

SPECIAL SMOOTHING AGENT



► Universal application

Your advantage:

The smoothing agent is suitable for all types of sealant (e.g. silicone acrylics, polyurethane sealants etc).

► Uniform cross linking

Your advantage:

Due to the uniform cross-linking of the surface, the sealant joint cures more quickly.

► Improvement of the surface

Your advantage:

By moistening the sealant compound and subsequently smoothing the joint, the joint surface is more pliant and smoother.

Note:

The jointing of steel parts may lead to corrosion when using the sealant smoothing agent.



Canister

Contents	Art. No.	P/Qty.
5 Ltrs	0893 3	1

Spray canister, empty

Filling vol.	Art. No.	P/Qty.
500 ml	0891 300	1

Spray gun

Art. No.	P/Qty.
0890 8	1


Silicone spatula

Art. No.	P/Qty.
0891 182	1

Silicone Spatula

Your advantages:

Flexible.
Radiused to different profiles.
Can be trimmed to shape if required.

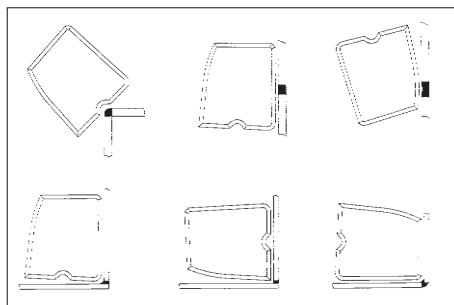

Technical Data:

Base	anionic surfactants
Colour	colourless, clear
Density	approx. 1.0g/ml \t 20°C
pH value	7
Shelf life	12 months
Boiling point	approx. 100°C

Subject to conditions during storage and application the results may vary. We always recommend individual tests. A consistent quality of our products is guaranteed. We reserve the right for technical changes and further development.

With this information we want to advise you to the best of our knowledge based on our tests and experience. Preliminary testing required! For further information see the technical data leaflet.