


## Full Extension Precision Runner

- Load capacity 40kg\*.
- Quick release facility.
- Soft buffer stop.
- Side mounting.
- Laterally stable.

Finish	H mm	L mm	Mounting Width mm	Art. No.	P. Qty
Zinc Plated	45.5	300	12.7+/-0.5	<b>1684 303 300</b>	1/10
		350		<b>1684 303 350</b>	
		400		<b>1684 303 400</b>	
		450		<b>1684 303 450</b>	
		500		<b>1684 303 500</b>	
		550		<b>1684 303 550</b>	

\* load capacity decreases with drawer width.

Recommended screw size 4mm or 4.5mm dia. x required length.  
Drawer rail also vertical and horizontal slots to give adjustment of +/- 4.5mm.

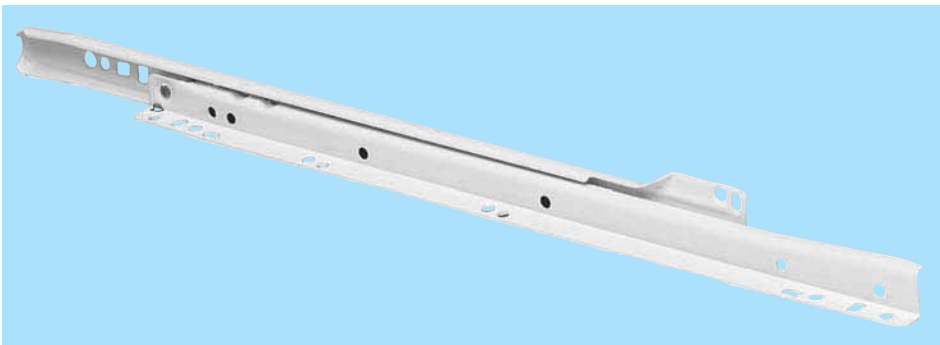

## Economy Single Extension Drawer Runners ECO Slide

- Load bearing capacity: 23kg.
- Self closing from 60mm onwards.
- To fit 32mm system.
- Drilled as standard for dia. 3.5mm Wüpo as well as Euro screws
- Bottle neck to assist insertion.
- Excellent running characteristics due to new type roller system.
- Height adjustment up to 3mm.
- Rear stop.
- Twin perforation for offset mounting.
- Great lateral stability due to positive guide on the right hand runner.
- Fitted with 4 nylon rollers.
- Colour: Cream (RAL 9001) or Brown.

Colour	Length mm	Art. No.	Pack/Qty.
Cream	250	<b>1684 125 141</b>	20
	300	<b>1684 125 142</b>	
	350	<b>1684 125 143</b>	
	400	<b>1684 125 144</b>	
	450	<b>1684 125 145</b>	
	500	<b>1684 125 146</b>	
Brown	550	<b>1684 125 147</b>	20
	350	<b>1684 125 153</b>	
	400	<b>1684 125 154</b>	
	450	<b>1684 125 155</b>	
	500	<b>1684 125 156</b>	