

## WIT-VM 250 WITH REBAR



300 ml

330 ml

420 ml

825 ml



ø8 - ø32

Rebar not supplied by Würth

### Approved for:

Concrete C20/25 to C50/60, non-cracked & cracked

### Suitable for:

Concrete C12/15, natural stone with dense structure

Cartridge sizes		Art. no.
300 ml	foil-in-tube	<b>0903 450 201</b>
420 ml	coaxial	<b>0903 450 205</b>
825 ml	side-by-side	<b>0903 450 206</b>
WIT-Nordic = for up to -20°C*:		
330 ml	coaxial	<b>0903 450 102</b>

\* For more information, please visit our Würth Online Shop

Type of installation			
	Pre-positioned	In-place	Stand-off
	✓	-	-
Installation condition			
	Dry concrete	Wet concrete	Flooded drill hole
	✓	✓	✓
Drilling method			
	Hammer drill	Diamond drill	Hollow drill
	✓	-	✓

### Applications



### Approvals and certificates



Description	Authority/laboratory	Guideline for assessment	No./date of issue
European Technical Assessment	DIBt, Berlin	ETAG 001-T5	ETA-12/0164, 12.11.2015
European Technical Assessment	DIBt, Berlin	EAD 330087-00-0601	ETA-12/0166, 27.02.2018
ICC-ES Evaluation Report	ICC	AC 308	ESR-4457, 01.09.2019
Fire resistance (concrete)	TU Kaiserslautern	TR 020	EBB 170019_6, 12.02.2018
LEED	eurofins		30.10.12
VOC Emissions Test report	eurofins	DEVL 1101903D, DEVL 1104875A	13.03.13
NSF International	NSF International	NSF/ANSI Standard61	02.01.20

### Basic load data (for a single anchor)

#### All data in this section applies when:

- Installation is correct (see installation instructions)
- No edge distance and spacing influence
- Base material thickness and embedment depth are according to anchor characteristics
- Rebar material is according to specifications, steel grade B500B
- Concrete C 20/25,  $f_{ck} = 20 \text{ N/mm}^2$
- Concrete C 50/60,  $f_{ck} = 60 \text{ N/mm}^2$
- Temperature range I (min. base material temperature  $-40^\circ\text{C}$ , max long term/short term base material temperature:  $+24^\circ\text{C}/40^\circ\text{C}$ ).
- Dry or wet conditions of drill hole, hammer drilling

#### Characteristic resistance

Rebar size				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth		$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
<b>Non-cracked concrete</b>												
Tension	C20/25	$N_{Rk}$	[kN]	20.1	33.9	49.8	66.0	68.8	109.0	149.7	218.2	255.6
	C50/60			22.1	37.3	54.7	72.6	82.9	141.0	199.6	261.3	282.0
Shear	$\geq \text{C20/25}$	$V_{Rk}$	[kN]	13.8	21.7	31.1	42.4	55.3	86.4	135.0	169.4	221.1
<b>Cracked concrete</b>												
Tension	C20/25	$N_{Rk}$	[kN]	8.0	14.1	22.8	30.2	34.6	58.7	90.7	152.8	178.9
	C50/60			8.8	15.6	25.1	33.3	38.0	64.6	99.8	169.8	215.6
Shear	$\geq \text{C20/25}$	$V_{Rk}$	[kN]	13.8	21.7	31.1	42.4	55.3	86.4	135.0	169.4	221.1

#### Design resistance

Rebar size				Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth		$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
<b>Non-cracked concrete</b>												
Tension	C20/25	$N_{Rd}$	[kN]	13.4	18.8	27.6	36.7	38.2	60.6	83.2	121.2	142.0
	C50/60			14.7	20.7	30.4	40.3	46.1	78.3	110.9	145.1	156.7
Shear	$\geq \text{C20/25}$	$V_{Rd}$	[kN]	9.2	14.5	20.7	28.2	36.9	57.6	90.0	112.9	147.4
<b>Cracked concrete</b>												
Tension	C20/25	$N_{Rd}$	[kN]	5.4	7.9	12.7	16.8	19.2	32.6	50.4	84.9	99.4
	C50/60			5.9	8.6	13.9	18.5	21.1	35.9	55.4	94.3	119.8
Shear	$\geq \text{C20/25}$	$V_{Rd}$	[kN]	9.2	14.5	20.7	28.2	36.9	57.6	90.0	112.9	147.4

## WIT-VM 250 WITH REBAR

### Recommended/allowable loads <sup>1)</sup>

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32	
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300	
<b>Non-cracked concrete</b>												
Tension	C20/25	$N_{rec}$	[kN]	9.6	13.5	19.7	26.2	27.3	43.3	59.4	86.6	101.4
	C50/60			10.5	14.8	21.7	28.8	32.9	56.0	79.2	103.7	111.9
Shear	$\geq$ C20/25	$V_{rec}$	[kN]	6.5	10.3	14.8	20.2	26.3	41.1	64.3	80.7	105.3
<b>Cracked concrete</b>												
Tension	C20/25	$N_{rec}$	[kN]	3.8	5.6	9.1	12.0	13.7	23.3	36.0	60.6	71.0
	C50/60			4.2	6.2	10.0	13.2	15.1	25.6	39.6	67.4	85.6
Shear	$\geq$ C20/25	$V_{rec}$	[kN]	6.5	10.3	14.8	20.2	26.3	41.1	64.3	80.7	105.3

<sup>1)</sup> Material safety factor  $\gamma_{M}$  and safety factor for action  $\gamma_{I} = 1.4$  are included. The material safety factor depends on the failure mode.

## Design method (simplified)

### Simplified version of the design method according to Eurocode 2 - Design of concrete structures - Part 4: Design of fastenings for use in concrete (EN 1992-4):

- Influence factors related to concrete strength, edge distance, spacing and others must be considered when applicable
- Valid for a group of anchors. The influencing factors must then be considered for each edge distance and spacing. The calculated design resistances are on the safe side. They will be lower than the exact values according to EN 1992-4. For an economical optimization, we recommend using the anchor design module of the Würth Technical Software II
- The design method is based on the simplification that no different loads are acting on individual anchors (no eccentricity)
- Temperature range 1 (min. base material temperature -40°C, max. long term/short term base material temperature: +24°C/40°C)
- Dry or wet conditions of drill hole, hammer drilling (Installation factors might apply for other drilling methods)
- Rebar material according to specifications, steel grade B500B

## I. Tension loading

The decisive design resistance in tension is the lowest value of the following failure modes:

1. Steel failure  $N_{Rd,s}$
2. Pull-out failure  $N_{Rd,p} = N_{Rd,p}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,p} \cdot f_{sy,p} \cdot f_{cx,1,p} \cdot f_{cx,2,p} \cdot f_{cy,p} \cdot f_{sus}$
3. Concrete cone failure  $N_{Rd,c} = N_{Rd,c}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx} \cdot f_{sy} \cdot f_{cx,1} \cdot f_{cx} \cdot f_{cy}$
4. Concrete splitting failure  $N_{Rd,sp} = N_{Rd,sp}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,sp} \cdot f_{sy,sp} \cdot f_{cx,1,sp} \cdot f_{cx,2,sp} \cdot f_{cy,sp} \cdot f_h$

## 1. Design steel tensile resistance

Table 1: Design value of steel resistance under tension load  $N_{Rd,s}$  of a single anchor

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
Design steel resistance	$N_{Rd,s}$	[kN]	19.6	31.0	44.4	60.5	79.0	123.4	192.9	242.0	315.9

# WIT-VM 250 WITH REBAR

## 2. Design combined pull-out and concrete cone resistance

$$N_{Rd,p} = N_{Rd,p}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,p} \cdot f_{sy,p} \cdot f_{cx,1,p} \cdot f_{cx,2,p} \cdot f_{cy,p} \cdot f_{sus}$$

Table 2: Basic design resistance  $N_{Rd,p}^0$  in case of combined pull-out and concrete cone failure of a single anchor

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
<b>Non-cracked concrete</b>											
Combined pull-out and concrete cone resistance	$N_{Rd,p}^0$	[kN]	13.4	18.8	27.6	36.7	41.9	71.2	100.8	131.9	142.4
<b>Cracked concrete</b>											
Combined pull-out and concrete cone resistance	$N_{Rd,p}^0$	[kN]	5.4	7.9	12.7	16.8	19.2	32.6	50.4	85.8	108.9

$$\bullet s_{cr,p} = 7.3 d (f_{sus} \cdot \tau_{Rk})^{0.5} \leq 3h_{ef} \qquad \bullet c_{cr,p} = s_{cr,p}/2$$

Where  $\tau_{Rk}$  is the value  $\tau_{Rk,ucr}$  for non-cracked concrete C20/25

Table 3: Characteristic edge distance  $c_{cr,p}$  and spacing  $s_{cr,p}$  ( $f_{sus} = 1$ )

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
Spacing	$s_{cr,p}$	[mm]	185	253	303	354	375	506	605	646	681
Edge distance	$c_{cr,p}$	[mm]	92	126	152	177	188	253	303	323	341

### a. Influence of concrete strength

Table 4: Influence of concrete strength on combined pull-out and concrete cone resistance

Concrete strength classes (EN 206:2000)			C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup>	$f_{ck}$	[N/mm <sup>2</sup> ]	12	16	20	25	30	35	40	45	50
Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>	$f_{ck,cube}$	[N/mm <sup>2</sup> ]	15	20	25	30	37	45	50	55	60
Influencing factor	$f_{b,N}$	[ ]	0.77	0.89	1.00	1.02	1.04	1.07	1.08	1.09	1.10

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

### b. Influence of embedment depth

$$f_{hef} = \frac{h_{ef}}{h_{ef,typ}}$$

Consider the approved range of embedment  $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$  according to the table „installation parameters“.

### c. Influence of spacing

$$f_{sx,p} = f_{sy,p} = \left( 1 + (n_{x(y)} - 1) \frac{s_{x(y)}}{s_{cr,p}} \right) \cdot \frac{1}{n_{x(y)}} \leq 1$$

Table 5: Influence of spacing on combined pull-out and concrete cone resistance

Number of fixing per direction	$s/s_{cr,p}$ <sup>1)</sup>	0,10	0,15	0,20	0,25	0,30	0,35	0,40	0,45	0,50	0,55	0,60	0,65	0,70	0,75	0,70	0,75	0,90	0,95	≥ 1,0
2	$f_{sx,p} \quad f_{sy,p}$	0,55	0,58	0,60	0,63	0,65	0,68	0,70	0,73	0,75	0,78	0,80	0,83	0,85	0,88	0,85	0,88	0,95	0,98	1,00
3	$f_{sx,p} \quad f_{sy,p}$	0,40	0,43	0,47	0,50	0,53	0,57	0,60	0,63	0,67	0,70	0,73	0,77	0,80	0,83	0,80	0,83	0,93	0,97	1,00
4	$f_{sx,p} \quad f_{sy,p}$	0,33	0,36	0,40	0,44	0,48	0,51	0,55	0,59	0,63	0,66	0,70	0,74	0,78	0,81	0,78	0,81	0,93	0,96	1,00
5	$f_{sx,p} \quad f_{sy,p}$	0,28	0,32	0,36	0,40	0,44	0,48	0,52	0,56	0,60	0,64	0,68	0,72	0,76	0,80	0,76	0,80	0,92	0,96	1,00

<sup>1)</sup> Choose always the lowest value of the spacing s, when there are different spacings in one row

### d. Influence of edge distance

$$f_{cx,1,p} = 0,7 + 0,3 \frac{c_x}{c_{cr,p}} \leq 1 \quad f_{cx,2,p} = f_{cy,p} = \left( 1 + \frac{c_{x(y)}}{c_{cr,p}} \right) \cdot \frac{1}{2} \leq 1$$

Table 6: Influence of edge distance on combined pull-out and concrete cone resistance

$c/c_{cr,p}$	0,10	0,15	0,20	0,25	0,30	0,35	0,40	0,45	0,50	0,55	0,60	0,65	0,70	0,75	0,70	0,75	0,90	0,95	≥ 1
$f_{cx,1}$	0,73	0,75	0,76	0,78	0,79	0,81	0,82	0,84	0,85	0,87	0,88	0,90	0,91	0,93	0,91	0,93	0,97	0,99	1,00
$f_{cx,2}$	0,55	0,58	0,60	0,63	0,65	0,68	0,70	0,73	0,75	0,78	0,80	0,83	0,85	0,88	0,85	0,88	0,95	0,98	1,00
$f_{cy}$																			

## WIT-VM 250 WITH REBAR

### e. Influence of sustained loads

$$\alpha_{sUS} = \frac{N_{sUS,d}}{N_{Ed}}$$

$N_{sUS,d}$  = design value of sustained actions (permanent actions & permanent component of variable actions)

$N_{Ed}$  = Value of total actions in tension loading at ultimate limit state

Table 7: Influence of sustained loads on combined pull-out and concrete cone resistance

$\alpha_{sUS}$	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
$f_{sUS}$	1.00	1.00	1.00	1.00	1.00	1.00	0.90	0.80	0.70	0.60

### 3. Design concrete cone resistance

$$N_{Rd,c} = N_{Rd,c}^0 \cdot f_{b,N} \cdot f_{sx} \cdot f_{sy} \cdot f_{cx,1} \cdot f_{cx,2} \cdot f_{cy}$$

No verification of splitting is required if at least one of the conditions is fulfilled:

- The edge distance in all directions is  $c \geq c_{cr,sp}$  for single fasteners and  $c \geq 1.2 c_{cr,sp}$  for fastener groups and the member depth is  $h \geq h_{min}$  in both cases.
- The characteristic resistance for concrete cone failure and pull-out failure is calculated for cracked concrete and reinforcement resists the splitting forces and limits the crack width to  $w_k \leq 0.3$  mm

Table 8: Basic design resistance  $N_{Rd,c}^0$  in case of concrete cone failure of a single anchor

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
<b>Non-cracked concrete</b>											
Concrete cone resistance	$N_{Rd,c}^0$	[kN]	23.5	23.3	31.5	38.2	38.2	60.6	83.2	121.2	142.0
<b>Cracked concrete</b>											
Concrete cone resistance	$N_{Rd,c}^0$	[kN]	16.4	16.3	22.1	26.7	26.7	42.4	58.2	84.9	99.4

Table 9: Characteristic edge distance  $c_{cr,N}$  and spacing  $s_{cr,N}$

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
Spacing	$s_{cr,N}$	[mm]	240	270	330	375	375	510	630	810	900
Edge distance	$c_{cr,N}$	[mm]	120	135	165	188	188	255	315	405	450

Above characteristic spacing and edge distances are given for the typical effective anchorage depths. Calculating for smaller depths leads to conservative load capacities. For calculation with bigger depths, use the following:

$$s_{cr,N} = 3 h_{ef} \text{ and } c_{cr,N} = 1.5 h_{ef}$$

## a. Influence of concrete strength

Table 10: Influence of concrete strength on concrete cone resistance

Concrete strength classes (EN 206:2000)			C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup>	$f_{ck}$	[N/mm <sup>2</sup> ]	12	16	20	25	30	35	40	45	50
Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>	$f_{ck,cube}$	[N/mm <sup>2</sup> ]	15	20	25	30	37	45	50	55	60
Influencing factor	$f_{b,N}$	[-]	0.77	0.89	1.00	1.12	1.22	1.32	1.41	1.50	1.58

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

## b. Influence of embedment depth

$$f_{hef} = \left( \frac{h_{ef}}{h_{ef,typ}} \right)^{1.5}$$

Consider the approved range of embedment  $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$  according to the table „anchor characteristics“.

## c. Influence of spacing

$$f_{sx} = f_{sy} = \left( 1 + (n_{x(y)} - 1) \frac{s_{x(y)}}{s_{cr,N}} \right) \cdot \frac{1}{n_{x(y)}} \leq 1$$

Table 11: Influence of spacing on concrete cone resistance

Number of fixing per direction	$s/s_{cr,p}$ <sup>1)</sup>	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.70	0.75	0.90	0.95	≥ 1
2	$f_{sx'} f_{sy}$	0.55	0.58	0.60	0.63	0.65	0.68	0.70	0.73	0.75	0.78	0.80	0.83	0.85	0.88	0.85	0.88	0.95	0.98	1.00
3	$f_{sx'} f_{sy}$	0.40	0.43	0.47	0.50	0.53	0.57	0.60	0.63	0.67	0.70	0.73	0.77	0.80	0.83	0.80	0.83	0.93	0.97	1.00
4	$f_{sx'} f_{sy}$	0.33	0.36	0.40	0.44	0.48	0.51	0.55	0.59	0.63	0.66	0.70	0.74	0.78	0.81	0.78	0.81	0.93	0.96	1.00
5	$f_{sx'} f_{sy}$	0.28	0.32	0.36	0.40	0.44	0.48	0.52	0.56	0.60	0.64	0.68	0.72	0.76	0.80	0.76	0.80	0.92	0.96	1.00

<sup>1)</sup> Choose always the lowest value of the spacing  $s$ , when there are different spacings in one row

## d. Influence of edge distance

$$f_{cx,1} = 0.7 + 0.3 \frac{c_x}{c_{cr,N}} \leq 1 \quad f_{cx,2} = f_{cy} = \left( 1 + \frac{c_{x(y)}}{c_{cr,N}} \right) \cdot \frac{1}{2} \leq 1$$

Table 12: Influence of edge distance on concrete cone resistance

$c/c_{cr,N}$	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.70	0.75	0.90	0.95	≥ 1
$f_{cx,1}$	0.73	0.75	0.76	0.78	0.79	0.81	0.82	0.84	0.85	0.87	0.88	0.90	0.91	0.93	0.91	0.93	0.97	0.99	1.00
$f_{cx,2}$	0.55	0.58	0.60	0.63	0.65	0.68	0.70	0.73	0.75	0.78	0.80	0.83	0.85	0.88	0.85	0.88	0.95	0.98	1.00
$f_{cy}$																			



# WIT-VM 250 WITH REBAR

## 4. Design splitting resistance

$$N_{Rd,sp} = N_{Rd,sp}^0 \cdot f_{b,N} \cdot f_{hef} \cdot f_{sx,sp} \cdot f_{sy,sp} \cdot f_{cx,1,sp} \cdot f_{cx,2,sp} \cdot f_{cy,sp} \cdot f_h$$

Table 13: Design resistance  $N_{Rd,sp}$  in case of concrete splitting failure of a single anchor

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
<b>Non-cracked concrete</b>											
Splitting resistance	$N_{Rd,sp}^0$	[kN]	13.4	18.8	27.6	36.7	38.2	60.6	83.2	121.2	142.0

Table 14: Characteristic edge distance  $c_{cr,sp}$  and spacing  $s_{cr,sp}$

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
Characteristic spacing	$s_{cr,sp}$	[mm]	360	420	528	600	590	816	1004	1296	1440
Characteristic edge distance	$c_{cr,sp}$	[mm]	180	210	264	300	295	408	502	648	720
Minimum member thickness	$h_{min}$	[mm]	110	120	142	161	165	218	274	340	380

Above characteristic spacing and edge distances are given for the typical effective anchorage depth. Calculating for smaller depths leads to conservative load capacities. For calculation with bigger depths, use the following:

$$s_{cr,sp} = 2 \cdot c_{cr,sp} \quad \text{and} \quad c_{cr,sp} = \left\{ h_{ef} \leq 2 h_{ef} \cdot \left( 2.5 - \left( \frac{h_{min}}{h_{ef}} \right) \right) \leq 2.4 h_{ef} \right\}$$

and  $h_{min}$  according to the table „anchor characteristics“.

### a. Influence of concrete strength

Table 15: Influence of concrete strength on splitting resistance

Concrete strength classes (EN 206:2000)			C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup>	$f_{ck}$	[N/mm <sup>2</sup> ]	12	16	20	25	30	35	40	45	50
Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>	$f_{ck,cube}$	[N/mm <sup>2</sup> ]	15	20	25	30	37	45	50	55	60
Influencing factor	$f_{b,N}$	[-]	0.77	0.89	1.00	1.12	1.22	1.32	1.41	1.50	1.58

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

### b. Influence of embedment depth

$$f_{hef} = \left( \frac{h_{ef}}{h_{ef,typ}} \right)^{1.5}$$

Consider the approved range of embedment  $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$  according to the table „anchor characteristics“.

### c. Influence of spacing

$$f_{sx,p} = f_{sy,p} = \left( 1 + (n_{x(y)} - 1) \frac{s_{x(y)}}{s_{cr,p}} \right) \cdot \frac{1}{n_{x(y)}} \leq 1$$

Table 16: Influence of spacing on splitting resistance

Number of fixing per direction	$s/s_{cr,sp}^{1)}$	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.70	0.75	0.90	0.95	$\geq 1$
2	$f_{sx,sp}, f_{sy,sp}$	0.55	0.58	0.60	0.63	0.65	0.68	0.70	0.73	0.75	0.78	0.80	0.83	0.85	0.88	0.85	0.88	0.95	0.98	1.00
3	$f_{sx,sp}, f_{sy,sp}$	0.40	0.43	0.47	0.50	0.53	0.57	0.60	0.63	0.67	0.70	0.73	0.77	0.80	0.83	0.80	0.83	0.93	0.97	1.00
4	$f_{sx,sp}, f_{sy,sp}$	0.33	0.36	0.40	0.44	0.48	0.51	0.55	0.59	0.63	0.66	0.70	0.74	0.78	0.81	0.78	0.81	0.93	0.96	1.00
5	$f_{sx,sp}, f_{sy,sp}$	0.28	0.32	0.36	0.40	0.44	0.48	0.52	0.56	0.60	0.64	0.68	0.72	0.76	0.80	0.76	0.80	0.92	0.96	1.00

<sup>1)</sup> Choose always the lowest value of the spacing  $s$ , when there are different spacings in one row

### d. Influence of edge distance

$$f_{cx,1,sp} = 0.7 + 0.3 \frac{c_x}{c_{cr,sp}} \leq 1 \quad f_{cx,2,sp} = f_{cy,sp} = \left( 1 + \frac{c_{x(y)}}{c_{cr,sp}} \right) \cdot \frac{1}{2} \leq 1$$

Table 17: Influence of edge distance on splitting resistance

$c/c_{cr,sp}$	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.70	0.75	0.90	0.95	$\geq 1$
$f_{cx,1,sp}$	0.73	0.75	0.76	0.78	0.79	0.81	0.82	0.84	0.85	0.87	0.88	0.90	0.91	0.93	0.91	0.93	0.97	0.99	1.00
$f_{cx,2,sp}$	0.55	0.58	0.60	0.63	0.65	0.68	0.70	0.73	0.75	0.78	0.80	0.83	0.85	0.88	0.85	0.88	0.95	0.98	1.00
$f_{cy,sp}$																			

### e. Influence of concrete member thickness

$$f_h = \left( \frac{h}{h_{min}} \right)^{2/3} \leq \max \left( 1; \left( \frac{h_{ef} + 1.5c_1}{h_{min}} \right)^{2/3} \right)$$

Table 18: Influence of concrete member thickness on splitting resistance

$h/h_{min}$	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2	2.1	2.2	2.3	2.4	2.3	2.4	2.7	2.8	2.9
$f_h$	1.00	1.07	1.13	1.19	1.25	1.31	1.37	1.42	1.48	1.53	1.59	1.64	1.69	1.74	1.79	1.74	1.79	1.94	1.99	2.00

# WIT-VM 250 WITH REBAR

## II. Shear loading

The decisive design resistance in shear is the lowest value of the following failure modes:

1. Steel failure  $V_{Rds}$
2. Concrete pry-out failure  $V_{Rd,c} = k \cdot \min \{N_{Rd,p}; N_{Rd,c}\}$
3. Concrete edge failure  $V_{Rd,c} = V_{Rd,c}^0 \cdot f_{b,V} \cdot f_{hef,V} \cdot f_{s,V} \cdot f_{c1,V} \cdot f_{c2,V} \cdot f_a \cdot f_h$

### 1. Design steel shear resistance

Table 19: Design value of steel resistance  $V_{Rd,s}$  of a single anchor

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
Design steel resistance	$V_{Rd,s}$	[kN]	9.2	14.5	20.7	28.2	36.9	57.6	90.0	112.9	147.4

### 2. Design concrete pry-out resistance

$$V_{Rd,c} = k_g \cdot \min \{N_{Rd,p}; N_{Rd,c}\}$$

Table 20: factor  $k_g$  for calculating design pry-out resistance

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage depth	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
Concrete pry-out resistance factor	$k_g$	[-]	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0

### 3. Design concrete edge resistance

$$V_{Rd,c} = V_{Rd,c}^0 \cdot f_{b,V} \cdot f_{hef,V} \cdot f_{s,V} \cdot f_{c1,V} \cdot f_{c2,V} \cdot f_a \cdot f_h$$

Verification of concrete edge failure may be omitted for single fasteners and groups with an edge distance in all directions  $c \geq \max(10 h_{ef}; 60 d)$ . For anchorages with more than one edge, the resistance for all edges shall be calculated. The smallest value should be used in the verification.

Table 21: Design resistance  $V_{Rd,c}^0$  in case of concrete edge failure

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Effective anchorage length	$h_{ef}$	[mm]	80	90	110	125	125	170	210	270	300
<b>Non-cracked concrete</b>											
Basic design edge resistance	$V_{Rd,c}^0$	[kN]	3.3	4.8	6.5	8.5	10.3	15.3	22.4	28.3	35.2
<b>Cracked concrete</b>											
Basic design edge resistance	$V_{Rd,c}^0$	[kN]	2.4	3.4	4.6	6.0	7.3	10.9	15.8	20.0	24.9

## a. Influence of concrete strength

Table 22: Influence of concrete strength on concrete edge resistance

Concrete strength classes (EN 206:2000)			C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Characteristic compressive strength of concrete determined by testing cylinders <sup>1)</sup>	$f_{ck}$	[N/mm <sup>2</sup> ]	12	16	20	25	30	35	40	45	50
Characteristic compressive strength of concrete determined by testing cube <sup>2)</sup>	$f_{ck,cube}$	[N/mm <sup>2</sup> ]	15	20	25	30	37	45	50	55	60
Influencing factor	$f_{b,N}$	[-]	0.77	0.89	1.00	1.12	1.22	1.32	1.41	1.50	1.58

<sup>1)</sup> strength at 28 days of 150 mm diameter by 300 mm cylinders

<sup>2)</sup> strength at 28 days of 150 mm cubes

## b. Influence of embedment depth

Table 23: Influence of embedment depth on concrete edge resistance

$h_{ef}/d$	4	5	6	7	8	9	10	11	≥ 12
$f_{hel,V}$	0.87	0.91	0.94	0.97	1.00	1.02	1.05	1.07	1.08

## c. Influence of spacing

In groups loaded perpendicular to the edge only two adjacent anchors closest and parallel to the edge carry the load. The smallest spacing should be used for the verification.

$$f_{s,V} = \frac{1}{3} \cdot \frac{s}{c_1} + 1 \leq 2$$

Table 24: Influence of spacing on concrete edge resistance

$s/c_1$ <sup>1)</sup>	0.50	0.60	0.70	0.80	0.90	1.00	1.20	1.40	1.60	1.80	2.00	2.20	2.40	2.60	2.80	2.60	2.80
$f_{s,V}$	1.17	1.20	1.23	1.27	1.30	1.33	1.40	1.47	1.53	1.60	1.67	1.73	1.80	1.87	1.93	1.87	1.93

<sup>1)</sup> Always choose the lowest value of the spacing  $s$ , when there are different spacings in the row closest to the edge.

## d. Influence of edge distance $c_1$

Table 25: Influence of edge distance  $c_1$  on concrete edge resistance

$c_1/d$	4	8	12	15	20	30	40	50	60	100	150	200
$f_{c_1,V}$	0.47	1.19	2.05	2.76	4.05	6.95	10.22	13.76	17.54	34.66	59.52	87.35

## WIT-VM 250 WITH REBAR

### e. Influence of edge distance $c_2$

$$f_{c2,v} = \left( \frac{1}{2} + \frac{1}{3} \frac{c_2}{c_1} \right) \left( 0.7 + 0.3 \frac{c_2}{1.5c_1} \right) \leq 1$$

Table 26: Influence of edge distance  $c_2$  on concrete edge resistance

$c_2/c_1$ <sup>1)</sup>	1	1.1	1.2	1.3	1.4	1.5
$f_{c,v}$	0.75	0.80	0.85	0.90	0.95	1.00

<sup>1)</sup> Distance to the second edge:  $c_1 \leq c_2$


### f. Influence of load direction

$$f_\alpha = \frac{1}{\sqrt{\cos^2 \alpha_v + \left( \frac{\sin \alpha_v}{2} \right)^2}} \leq 2$$

Table 27: Influence of load direction on concrete edge resistance

$\alpha$ <sup>1)</sup>	0	10	20	30	40	50	60	70	80	90
$f_{\alpha,v}$	1.00	1.01	1.05	1.11	1.20	1.34	1.51	1.72	1.92	2.00

<sup>1)</sup> For  $\alpha \geq 90^\circ$  the component of the shear load acting away from the edge may be neglected and the verification may be done with component acting parallel to the edge only.



### g. Influence of concrete member thickness

$$f_{h,v} = \left( \frac{h}{1.5c_1} \right)^{1/2}$$

Table 28: Influence of concrete member thickness on concrete edge resistance

$h/c_1$	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	1.1	1.2	1.3	1.4	$\geq 1.50$
$f_{h,v}$	0.26	0.37	0.45	0.52	0.58	0.63	0.68	0.73	0.77	0.82	0.86	0.89	0.93	0.97	1.00

## Structural verification

$N_{Ed}$  = Design value of tension load acting on a fastener

$V_{Ed}$  = Design value of a shear load acting on a fastener

	Failure mode	Verification
1	Steel failure of fastener <sup>1)</sup>	$\left(\frac{N_{Ed}}{N_{Rd}}\right)^2 + \left(\frac{V_{Ed}}{V_{Rd}}\right)^2 \leq 1$ <p>If <math>N_{Ed}</math> and <math>V_{Ed}</math> are different for the individual fasteners of the group, the interaction shall be verified for all fasteners.</p>
2	Failure modes other than steel failure	$\left(\frac{N_{Ed}}{N_{Rd,i}}\right)^{1.5} + \left(\frac{V_{Ed}}{V_{Rd,i}}\right)^{1.5} \leq 1$ <p>or</p> $\left(\frac{N_{Ed}}{N_{Rd,i}}\right) + \left(\frac{V_{Ed}}{V_{Rd,i}}\right) \leq 1,2$ <p>With <math>N_{Ed} / N_{Rd,i} \leq 1</math> and <math>V_{Ed} / V_{Rd,i} \leq 1</math>            The largest value of <math>N_{Ed} / N_{Rd,i}</math> and <math>V_{Ed} / V_{Rd,i}</math> for the different failure modes shall be taken.</p>

<sup>1)</sup> This verification is not required in case of shear load with lever arm

## WIT-VM 250 WITH REBAR

### Design bond strength

#### Service temperature

	Base material temperature	Maximum long-term base material temperature	Maximum short-term base material temperature
Temperature range I	- 40 °C to +40 °C	+24 °C	+40 °C
Temperature range II	- 40 °C to +80 °C	+50 °C	+80 °C
Temperature range III	- 40 °C to +120 °C	+72 °C	+120 °C

#### Working life of 50 years

##### 1- Non-cracked concrete

Rebar size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Design bond resistance in non-cracked concrete C20/25, Dry and wet concrete											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	6.7	6.7	6.7	6.7	6.7	6.7	6.1	5.6	4.7
Temperature range II			5.0	5.0	5.0	5.0	5.0	5.0	4.4	3.9	3.3
Temperature range III			3.7	3.6	3.6	3.6	3.6	3.6	3.3	2.8	2.5
Design bond resistance in non-cracked concrete C20/25, Flooded bore hole											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	3.6	4.0	4.0	4.0	4.0	not admissible			
Temperature range II			2.6	3.1	3.1	3.1	3.1	not admissible			
Temperature range III			1.9	2.4	2.4	2.4	2.4	not admissible			

##### 2- Cracked concrete

Rebar size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Design bond resistance in non-cracked concrete C20/25, Dry and wet concrete											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	2.7	2.8	3.1	3.1	3.1	3.1	3.1	3.6	3.6
Temperature range II			1.7	1.9	2.2	2.2	2.2	2.2	2.2	2.5	2.5
Temperature range III			1.3	1.4	1.7	1.7	1.7	1.7	1.7	1.9	1.9
Design bond resistance in non-cracked concrete C20/25, Flooded bore hole											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	1.9	1.9	2.6	2.6	2.6	not admissible			
Temperature range II			1.2	1.4	1.9	1.9	1.9	not admissible			
Temperature range III			1.0	1.2	1.4	1.4	1.4	not admissible			

## Reduction factors

### Working life of 50 years

#### 1- Non-cracked concrete

Rebar size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Reduction factor for non-cracked concrete C20/25, Dry and wet concrete											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Temperature range II			0.75	0.75	0.75	0.75	0.75	0.75	0.73	0.70	0.71
Temperature range III			0.55	0.54	0.54	0.54	0.54	0.54	0.55	0.50	0.53
Reduction factor for non-cracked concrete C20/25, Flooded bore hole											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	1.00	1.00	1.00	1.00	1.00	not admissible			
Temperature range II			0.73	0.76	0.76	0.76	0.76	not admissible			
Temperature range III			0.53	0.59	0.59	0.59	0.59	not admissible			

#### 2- Cracked concrete

Rebar size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Reduction factor for non-cracked concrete C20/25, Dry and wet concrete											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Temperature range II			0.63	0.70	0.73	0.73	0.73	0.73	0.73	0.69	0.69
Temperature range III			0.50	0.50	0.55	0.55	0.55	0.55	0.55	0.54	0.54
Reduction factor for non-cracked concrete C20/25, Flooded bore hole											
Temperature range I	$\tau_{Rd,ucr}$	[N/mm <sup>2</sup> ]	1.00	1.00	1.00	1.00	1.00	not admissible			
Temperature range II			0.63	0.75	0.73	0.73	0.73	not admissible			
Temperature range III			0.50	0.63	0.55	0.55	0.55	not admissible			



## WIT-VM 250 WITH REBAR

### Mechanical characteristics

Steel grade	Rebar size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø24	Ø25	Ø28	Ø32
	Stressed cross section	$A_s$	[mm <sup>2</sup> ]	50	79	113	154	201	314	452	491	616	804
	Section modulus	W	[mm <sup>3</sup> ]	50	98	170	269	402	785	1357	1534	2155	3217
460A	Yield strength	$f_y$	[N/mm <sup>2</sup> ]	460	460	460	460	460	460	460	460	460	460
	Tensile strength	$f_u$	[N/mm <sup>2</sup> ]	483	483	483	483	483	483	483	483	483	483
	Design bending moment	$M_{Rd,s}^0$	[Nm]	19	38	66	104	155	303	524	593	833	1243
460B	Yield strength	$f_y$	[N/mm <sup>2</sup> ]	460	460	460	460	460	460	460	460	460	460
	Tensile strength	$f_u$	[N/mm <sup>2</sup> ]	497	497	497	497	497	497	497	497	497	497
	Design bending moment	$M_{Rd,s}^0$	[Nm]	20	39	68	107	160	312	540	610	857	1279
B500B	Yield strength	$f_y$	[N/mm <sup>2</sup> ]	500	500	500	500	500	500	500	500	500	500
	Tensile strength	$f_u$	[N/mm <sup>2</sup> ]	550	550	550	550	550	550	550	550	550	550
	Design bending moment	$M_{Rd,s}^0$	[Nm]	22	43	75	118	177	345	597	675	948	1415

### Material specifications

Product form		Bars and de-coiled rods		
Class		A	B	C
Characteristic yield strength $f_{yk}$ or $f_{0.2k}$ (MPa)		400 to 600		
Minimum value of $k = (f_y/f_k)_k$		≥ 1.05	≥ 1.08	≥ 1.15 < 1.35
Characteristic strain at maximum force, $\epsilon_{yk}$ (%)		≥ 2.5	≥ 5.0	≥ 7.5
Bendability		Bend/Rebend test		
Maximum deviation from nominal mass (individual bar or wire) (%)	Nominal bar size (mm)			
	≤ 8 > 8	+/- 6.0 +/- 4.5		

## Chemical resistance

Chemical Agent	Concentration	Resistant	Not Resistant
Accumulator acid		●	
Acetic acid	40		●
Acetic acid	10	●	
Acetone	10		●
Ammonia, aqueous solution	5	●	
Aniline	100		●
Beer		●	
Benzene (kp 100-140°F)	100	●	
Benzol	100		●
Boric Acid, aqueous solution		●	
Calcium carbonate, suspended in water	all	●	
Calcium chloride, suspended in water		●	
Calcium hydroxide, suspended in water		●	
Carbon tetrachloride	100	●	
Caustic soda solution	10	●	
Citric acid	all	●	
Diesel oil	100	●	
Ethyl alcohol, aqueous solution	50		●
Formic acid	100		●
Formaldehyde, aqueous solution	30	●	
Freon		●	
Fuel Oil		●	
Gasoline (premium grade)	100	●	
Glycol (Ethylene glycol)		●	
Hydraulic fluid	conc.	●	
Hydrochloric acid (Muriatic Acid)	conc.		●
Hydrogen peroxide	30		●
Isopropyl alcohol	100		●
Lactic acid	all	●	
Linseed oil	100	●	
Lubricating oil	100	●	
Magnesium chloride, aqueous solution	all	●	
Methanol	100		●
Motor oil (SAE 20 W-50)	100	●	
Nitric acid	10		●
Oleic acid	100	●	
Perchloroethylene	100	●	
Petroleum	100	●	
Phenol, aqueous solution	8		●
Phosphoric acid	85	●	
Potash lye (Potassium hydroxide)	10	●	
Potassium carbonate, aqueous solution	all	●	
Potassium chlorite, aqueous solution	all	●	
Potassium nitrate, aqueous solution	all	●	
Sodium carbonate	all	●	
Sodium Chloride, aqueous solution	all	●	
Sodium phosphate, aqueous solution	all	●	
Sodium silicate	all	●	
Standard Benzine	100	●	
Sulfuric acid	10	●	
Sulfuric acid	70		●
Tartaric acid	all	●	
Tetrachloroethylene	100	●	
Toluene			●
Trichloroethylene	100		●
Turpentine	100	●	

Results shown in the table are applicable to brief periods of chemical contact with full cured adhesive (e.g. temporary contact with adhesive during a spill).

## WIT-VM 250 WITH REBAR

### Properties of adhesive

Property		Testing method	Result / mean value
<b>Stability</b>			
UV-resistance (sunlight)			not resistant
Temperature resistance			120 °C
Water resistance			resistant
Cleaning agents			1% tenside solution: no effect
<b>Physical properties</b>			
Flexural properties	Flexural strength	DIN EN 196-1	after 24 hours: 14.7 N/mm <sup>2</sup>
Compressive properties	Compressive strength	DIN EN 196-1	after 24 hours: ≥ 100 N/mm <sup>2</sup>
Dynamic modulus of elasticity		DIN EN 12504-4	after 24 hours: 14,09 GPa
Thermal conductivity	Modified transient plane source method		0,66 / 0,63 W/mK
Specific contact resistance		IEC 93	3,6 x 10 <sup>9</sup> Ωcm
Density		DIN 53479	1,77 ± 0,1 g/cm <sup>3</sup>
<b>Workability features</b>			
Water tightness / Impermeability		DIN EN 12390-8	after 72 hours at 5 bar: 0 mm
Open time (10-20 °C)			15 min
Curing time (10-20 °C)			80 min
Shelf-life			18 months

For information use only. Values are not to be considered as a specification and do not reflect the performance of the system. The given values are typical values and are subject to change without notice.

### Working and curing times


Temperature of base material	Gelling – working time	Min. curing time – dry conditions <sup>1)</sup>
-10 °C to -6 °C	90 min <sup>2)</sup>	24 h
-5 °C to -1 °C	90 min	14 h
0 °C to 4 °C	45 min	7 h
5 °C to 9 °C	25 min	2 h
10 °C to 19 °C	15 min	80 min
20 °C to 29 °C	6 min	45 min
30 °C to 34 °C	4 min	25 min
35 °C to 39 °C	2 min	20 min
> 40 °C	90 s	15 min

<sup>1)</sup> for wet base material the curing time must be doubled

<sup>2)</sup> Cartridge temperature must be at min. +15 °C

## Installation parameters


Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25	Ø 28	Ø 32
Nominal drill hole diameter	$d_o$	[mm]	12	14	16	18	20	25	32	35	40
Effective anchorage depth	$h_{ef,min}$	[mm]	60	60	70	75	80	90	100	112	128
	$h_{ef,max}$	[mm]	160	200	240	280	320	400	480	540	640
Diameter of steel brush	$d_b \geq$	[mm]	14	16	18	20	22	26	34	37	41.5
Minimum thickness of member	$h_{min}$	[mm]	$h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$			$h_{ef} + 2d_o$					
Minimum spacing	$s_{min}$	[mm]	40	50	60	70	80	100	125	140	160
Minimum edge distance	$c_{min}$	[mm]	40	50	60	70	80	100	125	140	160

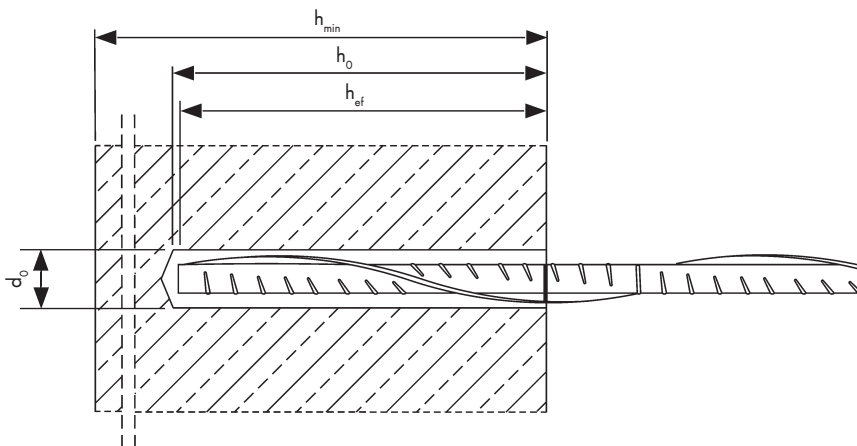

# WIT-VM 250 WITH REBAR

## Installation instructions

### A) Bore hole drilling

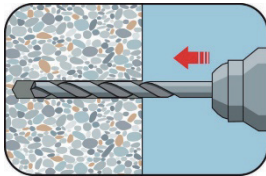


#### 1a. Hammer (HD) or compressed air drilling (CD)

Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar. In case of aborted drill hole, the drill hole shall be filled with mortar.


### B) Bore hole cleaning

MAC: Cleaning for bore hole diameter  $d_0 \leq 20$  mm and bore hole depth  $h_0 \leq 10 d_s$  (non-cracked concrete only!)


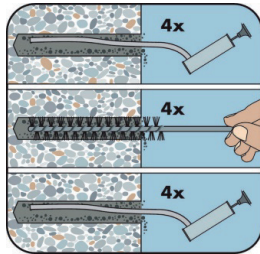

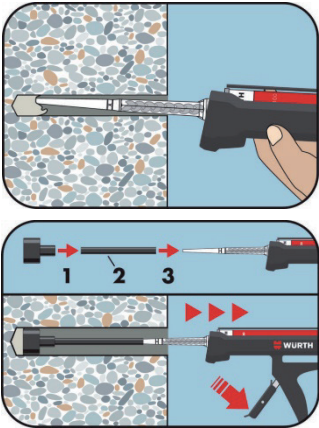


- 2a.** Starting from the bottom or back of the bore hole, blow the hole clean using a hand pump a minimum of four times.
- 2b.** Check brush diameter. Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  a minimum of four times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension shall be used.
- 2c.** Finally blow the hole clean again with a hand pump a minimum of four times.

CAC: Cleaning for dry, wet and water-filled bore holes with all diameters (non-cracked and cracked concrete)

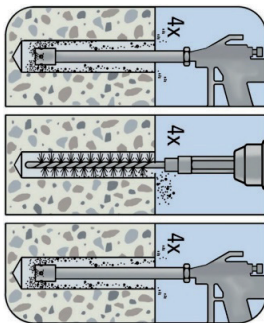

- 2a.** Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) a minimum of four times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.
- 2b.** Check brush diameter. Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  a minimum of four times. If the bore hole ground is not reached with the brush, a brush extension shall be used.
- 2c.** Finally blow the hole clean again with compressed air (min. 6 bar) a minimum of four times until return air stream is free of noticeable dust. If the bore hole ground is not reached, an extension shall be used.

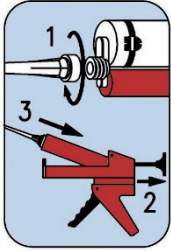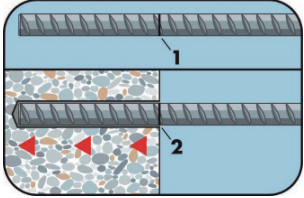C) Preparation of anchor rod and cartridge	
	<p><b>3a.</b> Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. For every working interruption longer than the recommended working time as well as for every new cartridge, a new static-mixer shall be used.</p>
	<p><b>3b.</b> Prior to inserting the reinforcing bar into the filled bore hole, the position of the embedment depth shall be marked (e.g. with tape) on the reinforcing bar. After that, insert the bar in the empty hole to verify hole and depth. The anchor should be free of dirt, grease, oil and other foreign material.</p>
	<p><b>3c.</b> Prior to dispensing into the bore hole, squeeze out separately the mortar until it shows a consistent grey or red color (minimum of three full strokes) and discard non-uniformly mixed adhesive components.</p>
D) Filling the bore hole	
	<p><b>4.</b> Starting from the bottom or back of the cleaned bore hole, fill the hole with adhesive until the level mark at the mixer extension is visible at the top of the hole. For embedment larger than 190 mm, an extension nozzle shall be used. Slowly withdraw the static mixing nozzle. Using a piston plug during injection of the mortar helps to avoid creating air pockets.</p> <p>For overhead and horizontal installation and bore holes deeper than 240 mm, a piston plug and the appropriate mixer extension must be used. Observe the gel-/ working times.</p>

**WIT-VM 250 R**

## WIT-VM 250 WITH REBAR

E) Setting the rebar	
	<p><b>5a.</b> Push the reinforcing bar into the bore hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The bar should be free of dirt, grease, oil or other foreign material.</p>
	<p><b>5b.</b> Be sure that the bar is inserted in the bore hole until the embedment mark is at the concrete surface and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For horizontal and overhead installation, fix embedded part (e.g. with wedges).</p>
	<p><b>5c.</b> Observe gelling time <math>t_{gel}</math>. Attend that the gelling time can vary according to the base material temperature. Do not move or load the bar until full curing time <math>t_{cure}</math> has elapsed. Allow the adhesive to cure to the specified time prior to applying any load. Do not move or load the bar until it is fully cured. After full curing time <math>t_{cure}</math> has elapsed, the add-on part can be installed.</p>

### Filling Quantity

Anchor type: Ø 8 - Ø 32

Rebar size			Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 24	Ø 25	Ø 28	Ø 32	
Nominal drill hole diameter	$d_o$	[mm]	12	14	16	18	20	25	32	32	35	40	
Drill depth	$h_o / h_1$	[mm]	$= l_v$										
Filling volume per 10mm embedment depth		[ml]	0.81	1.01	1.21	1.43	1.66	2.59	4.85	4.47	5.07	6.62	

Assumed waste of 15 % included.

