

DECLARATION OF PERFORMANCE

Nr. LE_5930208010_01_M_Fixanchor W-FAZ PRO

This is an English translation of the original German wording.
In cases of doubt, the German version applies

- | | |
|--|--|
| 1. Unique identification code of the product type: | Würth Fixanchor W-FAZ PRO
Article numbers: 5930 |
| 2. Intended use(s): | Mechanical anchor for use in concrete |
| 3. Manufactured by: | Adolf Würth GmbH & Co. KG
Reinhold-Würth-Str. 12 - 17
D - 74653 Künzelsau |
| 4. System(s) of assessment and verification of constancy of performance: | System 1 |
| 5. European Assessment Document:
European Technical Assessment:
Technical Assessment Body:
Notified Body or Bodies: | EAD 33023232-01-0601, Edition 05/2021
ETA-20/0229 vom 26.01.2022
Deutsches Institut für Bautechnik (DIBt), Berlin
2873, Institut für Stahlbau und Werkstoffmechanik (IFSW), Darmstadt |
| 6. Declared performance/s | |

Essential characteristic	Performance	harmonized technical Spezifikation	
Mechanical resistance and stability (BWR 1)			
Characteristic resistance to tension load (static and quasi-static loading) Method A	See Annex B3, C1, C2	ETA-20/0229 EAD 330232-00-0601	
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C3		
Displacements	See Annex C8 und C9		
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C4, C5, C8 und C9		
Safety in case of fire (BWR 2)			
Reaction to fire	Klasse A1		
Resistance to fire	See Annex C6 und C7		
Aspects of durability linked with the Basic Works Requirements			
Durability	See Annex B1		

The performance of the product identified above corresponds to the declared performance/s.

This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Frank Wolpert

Authorized Signatory, Head of Product
Management, Divisions and Marketing

Dr. -Ing. Siegfried Beichter

Authorized Signatory, Head of Quality
and Product security

Künzelsau, 01/03/2022

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-20/0229
of 26 January 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Würth Fixanchor W-FAZ PRO

Product family
to which the construction product belongs

Mechanical fasteners for use in concrete

Manufacturer

Adolf Würth GmbH & Co. KG
Reinhold-Würth-Straße 12-17
74653 Künzelsau
DEUTSCHLAND

Manufacturing plant

Werk W1

This European Technical Assessment
contains

23 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330232-01-0601, Edition 05/2021

This version replaces

ETA-20/0229 issued on 3 April 2020

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Würth Fixanchor W-FAZ PRO is a fastener made of zinc plated steel, stainless steel or high corrosion resistant steel which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading) Method A	see Annex B3, C1, C2
Characteristic resistance to shear load (static and quasi-static loading)	see Annex C3
Displacements	see Annex C8 and C9
Characteristic resistance and displacements for seismic performance categories C1 and C2	see Annex C4, C5, C8 and C9

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	see Annex C6 and C7

3.3 Aspects of durability linked with the Basic Works Requirements

Essential characteristic	Performance
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: 1996/582/EC.

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

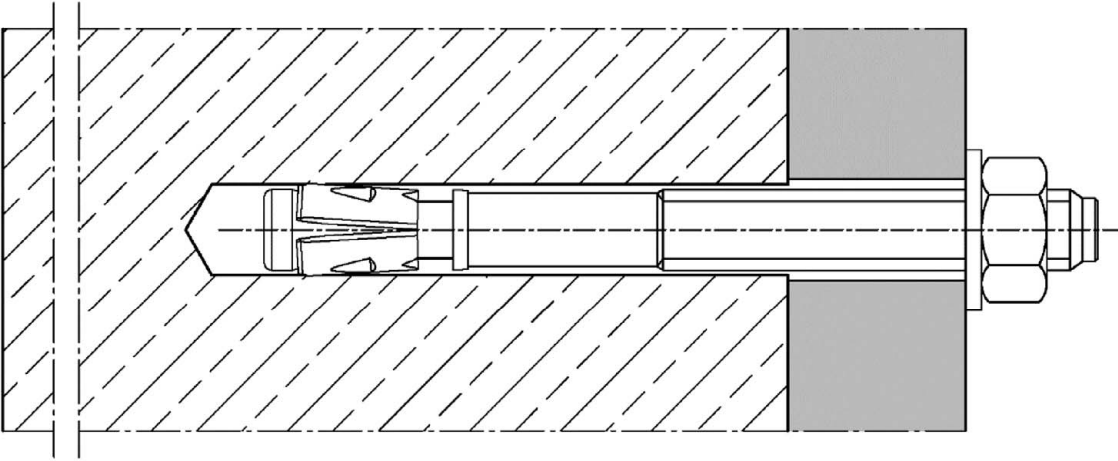
Issued in Berlin on 26 January 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section


beglaubigt:
Baderschneider

Throughbolt Fixanchor W-FAZ PRO/S, W-FAZ PRO/A4 and W-FAZ PRO/HCR


Installation condition



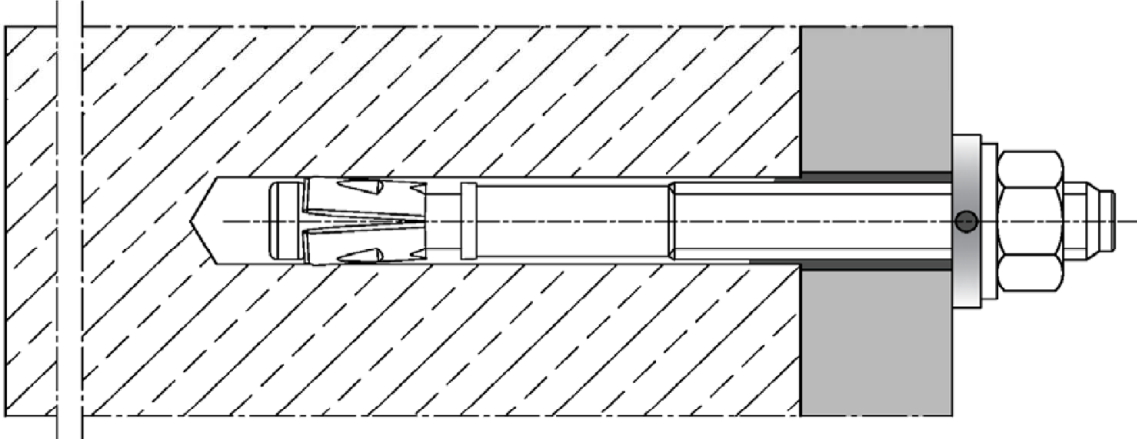Installation condition with filling washer (optional with cap nut)



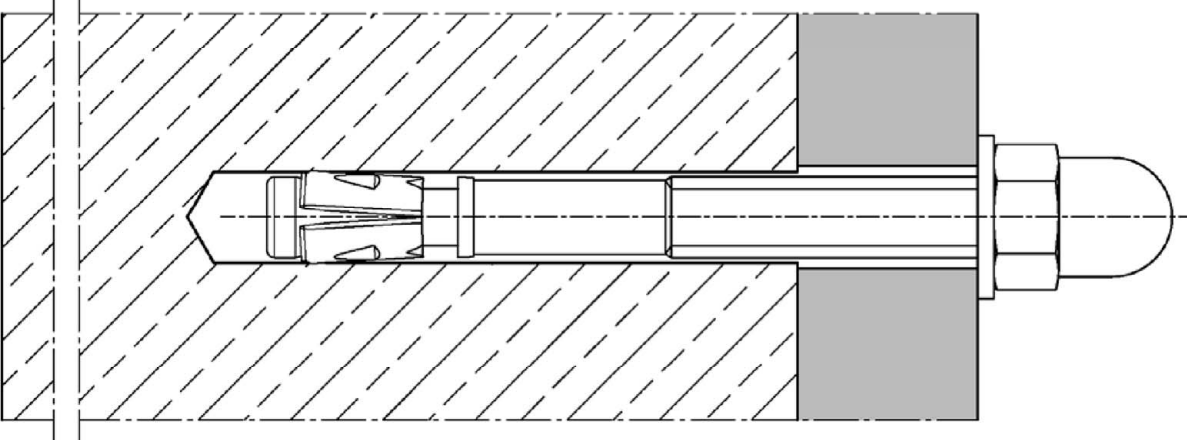Installation condition with cap nut HM (optional with filling washer)




Würth Fixanchor W-FAZ PRO

Product description
Product types and installation conditions

Annex A1

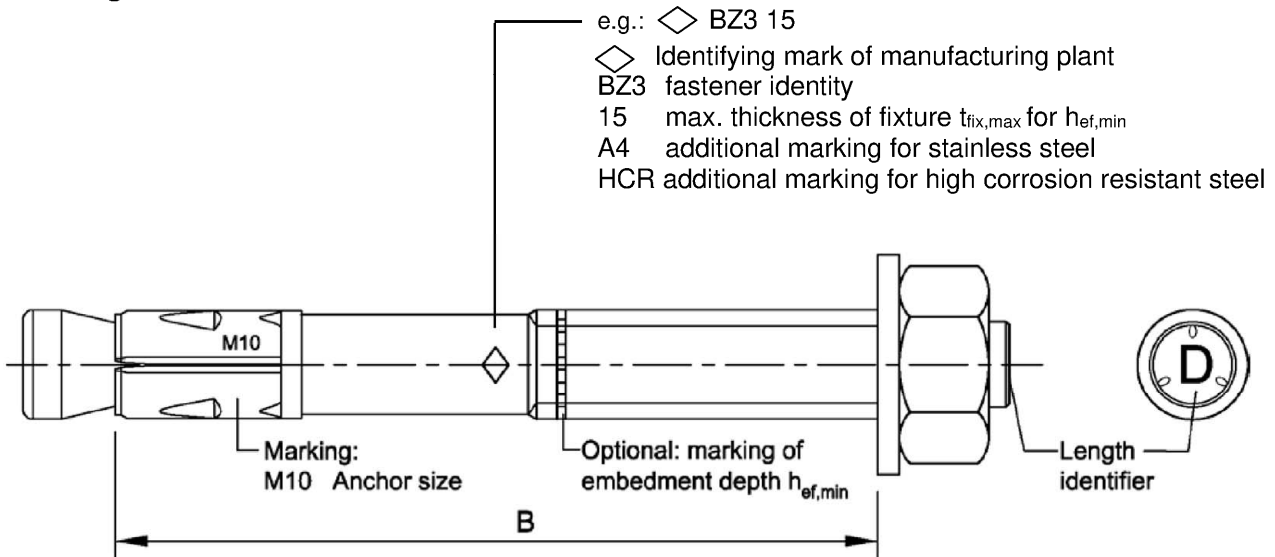Marking



Usable length: $B = h_{ef} + t_{fix}$

h_{ef} : (existing) effective anchorage depth

t_{fix} : fixture thickness (including e.g. levelling layers or other non-load-bearing layers or additional filling washer)

Table A1: Length identification

Length identifier	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
Usable length B \geq	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105

Length identifier	P	Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
Usable length B \geq	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210

Length identifier	EE	FF	GG	HH	II	JJ	KK	LL
Usable length B \geq	220	230	240	250	260	270	280	290

Dimensions in mm

Würth Fixanchor W-FAZ PRO

Product description
Marking


Annex A2

Table A2: Material

Part	W-FAZ PRO/S	W-FAZ PRO/A4	W-FAZ PRO/HCR
	Steel, zinc plated	Stainless steel CRC III	High corrosion resistant steel CRC V
Conical bolt	Steel, galvanized ≥ 5 µm, fracture elongation A ₅ ≥ 8%	Stainless steel, fracture elongation A ₅ ≥ 8%	High corrosion resistant steel, fracture elongation A ₅ ≥ 8%
Expansion sleeve	Stainless steel	Stainless steel	Stainless steel
Washer	Steel, galvanized ≥ 5 µm	Stainless steel	High corrosion resistant steel
Filling washer			
Hexagon nut			
Cap nut			

Table A3: Fastener dimensions

Fastener size			W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR			
			M8	M10	M12	M16
Width across hexagon nut / cap nut	SW	[mm]	13	17	19	24
Length of fastener	L	[mm]	$h_{ef} + t_{fix} + 18,0$	$h_{ef} + t_{fix} + 21,5$	$h_{ef} + t_{fix} + 26,0$	$h_{ef} + t_{fix} + 33,0$
Thickness of filling washer	t	[mm]	5			

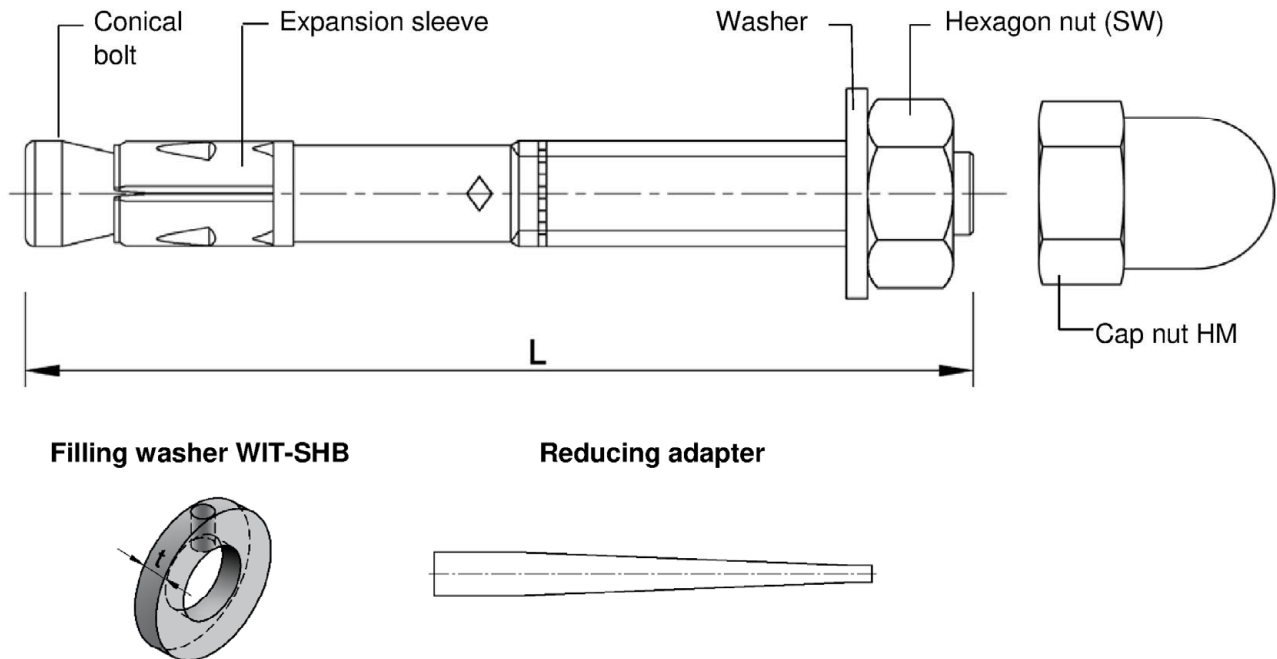

Würth Fixanchor W-FAZ PRO

Product description
Material and dimensions

Annex A3

Specifications of intended use

Fixanchor	W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR			
	M8	M10	M12	M16
Static or quasi-static action	✓			
Seismic performance categories C1 and C2	✓			
Fire exposure	R30 / R60 / R90 / R120			
Variable, effective anchorage depth	35 mm to 90 mm	40 mm to 100 mm	50 mm to 125 mm	65 mm to 160 mm

Base materials:

- Cracked or uncracked concrete
- Reinforced or unreinforced normal weight concrete without fibers according to EN 206:2013 + A1:2016
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions: all materials
- For all other conditions according to EN 1993-1-2006 + A1:2015-10, corresponding to corrosion resistance classes CRC according to Annex A3, Table A2:

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.
- The position of the fastener is indicated on the design drawings (e.g. position of the fastener relative to reinforcement or to supports, etc.).
- Design method EN 1992-4:2018 and Technical Report TR 055:2018

Installation:


- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Hole drilling by hammer drill bit or vacuum drill bit
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener (exception: when using the cap nut HM)
- The anchor can be set in pre- or through-setting installation.
- Optionally, the annular gap between fixture and stud of W-FAZ PRO can be filled to reduce the hole clearance. For this purpose, the filling washer (Annex A3) must be used in addition to the supplied washer. For filling use Würth Injection Adhesive WIT-UM 300, WIT-VM 250, WIT-PE 1000, WIT-VIZ or other high-strength injection mortar with compressive strength $\geq 40\text{N/mm}^2$.

Würth Fixanchor W-FAZ PRO	Annex B1
Intended use Specifications	

Table B1: Installation parameters

Anchor size			W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR				
			M8	M10	M12	M16	
Nominal drill hole diameter	d_0	[mm]	8	10	12	16	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,5	16,5	
Minimum effective anchorage depth	$h_{ef,min}$	[mm]	35	40	50	65	
Maximum effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160	
Depth of drill hole	$h_0 \geq$	[mm]	$h_{ef} + 8$	$h_{ef} + 9$	$h_{ef} + 10$	$h_{ef} + 14$	
	$h_1 \geq$	[mm]	$h_{ef} + 10$	$h_{ef} + 11$	$h_{ef} + 13$	$h_{ef} + 17$	
Diameter of clearance hole in the fixture ¹⁾	$d_f \leq$	[mm]	9	12	14	18	
Projection after anchor has been inserted for installing with cap nut HM (according to Annex B6, Figure 3)	C	[mm]	10,5	12,5	16,0	19,5	
Installation torque	W-FAZ PRO/S	T_{inst}	[Nm]	15	40	60	110
	W-FAZ PRO/A4 W-FAZ PRO/HCR	T_{inst}	[Nm]	15	40	55	100

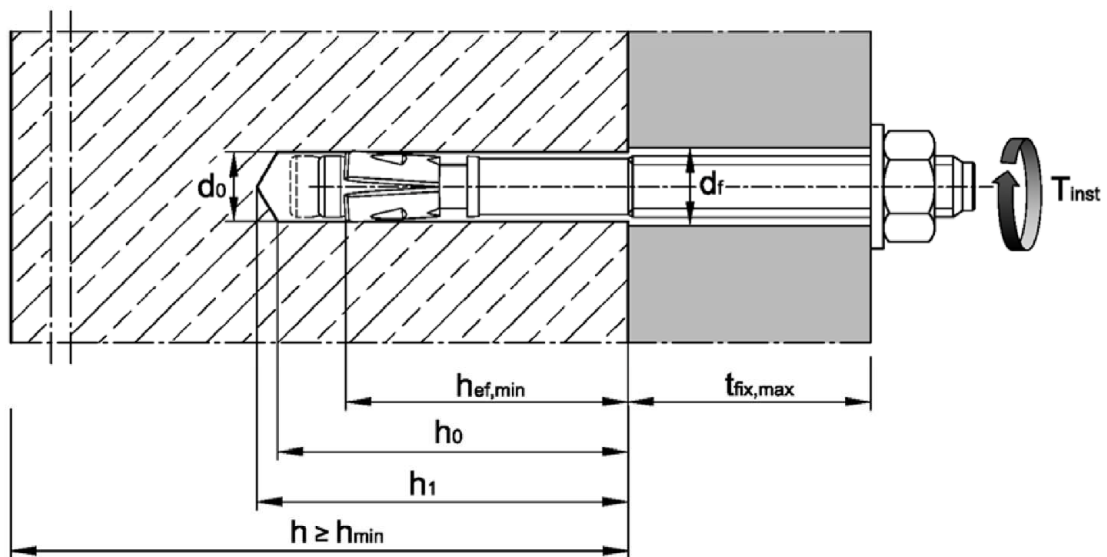¹⁾ For larger diameters of clearance hole in the fixture, see EN 1992-4:2018, chapter 6.2.2.2



Würth Fixanchor W-FAZ PRO

Intended use
Installation parameters

Annex B2

Table B2: Minimum thickness of concrete member, minimum spacings, edge distances

Anchor size			W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR			
			M8	M10	M12	M16
Minimum member thickness depending on h_{ef}	$h_{min} \geq$	[mm]	max (1,5 · h_{ef} ; 80)		max (1,5 · h_{ef} ; 100)	max (1,5 · h_{ef} ; 120)
Minimum edge distances and spacings						
Minimum edge distance	c_{min}	[mm]	40	45	55	65
	for $s \geq$	[mm]	see Table B4			
Minimum spacings	s_{min}	[mm]	35	40	50	65
	for $c \geq$	[mm]	see Table B4			
<p>The following equation must be fulfilled for the calculation of the minimum spacing and edge distance during installation in combination with variable anchorage depth and member thickness:</p> $A_{sp,req} \leq A_{sp,ef}$ <p>Required splitting area $A_{sp,req}$ and idealized splitting area $A_{sp,ef}$ according to Table B4.</p>						

Table B3: Applicable concrete thickness h_{sp} and area A_{sp} to determine characteristic edge distance $c_{cr,sp}$

Anchor size			M8	M10	M12	M16
Applicable concrete thickness	W-FAZ PRO/S W-FAZ PRO/A4 W-FAZ PRO/ HCR	h_{sp} [mm]	$\min(h ; h_{ef} + 1,5 \cdot c \cdot \sqrt{2})$			
Area to determine $c_{cr,sp}$ ¹⁾	W-FAZ PRO/S	A_{sp} [mm ²]	$\frac{N_{Rk,sp}^0 - 2,573}{0,000436}$	$\frac{N_{Rk,sp}^0 + 2,040}{0,000693}$	$\frac{N_{Rk,sp}^0 + 3,685}{0,000692}$	$\frac{N_{Rk,sp}^0 + 3,738}{0,000875}$
	W-FAZ PRO/A4 W-FAZ PRO/HCR	A_{sp} [mm ²]	$\frac{N_{Rk,sp}^0 + 4,177}{0,000862}$	$\frac{N_{Rk,sp}^0 + 7,235}{0,000967}$	$\frac{N_{Rk,sp}^0 + 7,847}{0,000951}$	$\frac{N_{Rk,sp}^0 + 11,415}{0,000742}$

¹⁾ with $N_{Rk,sp}^0$ in kN

Würth Fixanchor W-FAZ PRO	Annex B3
Intended use Minimum spacings and edge distances Required area and applicable concrete thickness	

Table B4: Areas to determine spacings and edge distances for installation

Anchor size	W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR						
	M8	M10	M12	M16			
<p>The following equation must be fulfilled for the calculation of the minimum spacing and edge distance during installation in combination with variable anchorage depth and member thickness:</p> $A_{sp,req} \leq A_{sp,ef}$							
<p>Idealized splitting area $A_{sp,ef}$ The edge distances and spacings shall be selected or rounded in steps of 5 mm.</p>							
<p>Member thickness: $h > h_{ef} + 1,5 \cdot c$</p>							
<p>Single anchor or anchor group with $s \geq 3 \cdot c$</p>							
Effective anchorage depth	$h_{ef} < 1,5 \cdot c$	$A_{sp,ef} = (6 \cdot c) \cdot (1,5 \cdot c + h_{ef})$		[mm ²]			
Effective anchorage depth	$h_{ef} \geq 1,5 \cdot c$	$A_{sp,ef} = (6 \cdot c) \cdot (3 \cdot c)$		[mm ²]			
<p>Anchor group ($s < 3 \cdot c$)</p>							
Effective anchorage depth	$h_{ef} < 1,5 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot (1,5 \cdot c + h_{ef})$		[mm ²]			
Effective anchorage depth	$h_{ef} \geq 1,5 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot (3 \cdot c)$		[mm ²]			
<p>Member thickness: $h \leq h_{ef} + 1,5 \cdot c$</p>							
<p>Single anchor or anchor group with $s \geq 3 \cdot c$</p>							
Effective anchorage depth	$h_{ef} < 1,5 \cdot c$	$A_{sp,ef} = (6 \cdot c) \cdot h$		[mm ²]			
Effective anchorage depth	$h_{ef} \geq 1,5 \cdot c$	$A_{sp,ef} = (6 \cdot c) \cdot (h - h_{ef} + 1,5 \cdot c)$		[mm ²]			
<p>Anchor group ($s < 3 \cdot c$)</p>							
Effective anchorage depth	$h_{ef} < 1,5 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot h$		[mm ²]			
Effective anchorage depth	$h_{ef} \geq 1,5 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot (h - h_{ef} + 1,5 \cdot c)$		[mm ²]			
<p>Required splitting area $A_{sp,req}$</p>							
W-FAZ PRO/S	cracked concrete	$A_{sp,req}$	[mm ²]	13 900	23 700	31 500	42 300
	uncracked concrete	$A_{sp,req}$	[mm ²]	22 500	34 700	41 300	50 200
W-FAZ PRO/A4 W-FAZ PRO/HCR	cracked concrete	$A_{sp,req}$	[mm ²]	16 900	25 900	29 800	44 300
	uncracked concrete	$A_{sp,req}$	[mm ²]	19 700	35 700	35 300	54 800

Würth Fixanchor W-FAZ PRO

Intended use

Projected effective area to determine spacings and edge distances

Annex B4

Installation instructions








1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Drive in fastener.</p>
4		<p>Apply installation torque T_{inst}.</p>

Würth Fixanchor W-FAZ PRO

Intended use
Installation instructions

Annex B5

Installation with cap nut HM






1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Check position of nut. Projection C after anchor has been inserted see Annex B2, Table B1.</p>
4		<p>Drive in fastener.</p>
5		<p>Remove nut.</p>
6		<p>Screw on cap nut</p>
7		<p>Apply installation torque T_{inst}.</p>

Würth Fixanchor W-FAZ PRO

Intended use
Installation instructions with cap nut

Annex B6

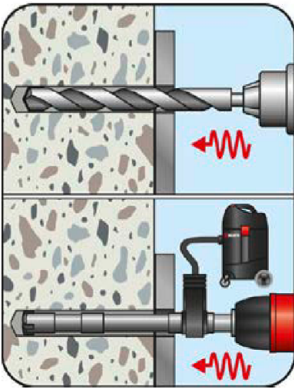Installation instructions with filling of annular gap

1		<p>Drill hole perpendicular to concrete surface. If using a vacuum drill bit, proceed with step 3.</p>
2		<p>Blow out dust. Alternatively vacuum clean down to the bottom of the hole.</p>
3		<p>Drive in fastener with additionally mounted filling washer.</p>
4		<p>Apply installation torque $T_{inst.}$</p>
5		<p>Fill the annular gap between anchor and fixture with injection adhesive (see Annex B1). Use enclosed reducing adapter. The annular gap is completely filled, when excess mortar seeps out.</p>

Würth Fixanchor W-FAZ PRO

Product description
Product types and installation conditions

Annex B7

Table C1: Characteristic values for **tension loads** under static and quasi-static action, **W-FAZ PRO/S** (steel, zinc plated)

Fastener size			W-FAZ PRO/S			
			M8	M10	M12	M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	79,3
Partial factor ⁴⁾	γ_{Ms}	[-]	1,5			
Pull-out						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	15	22	30
Increasing factor $N_{Rk,p,cr} = \psi_C \cdot N_{Rk,p,cr} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,439}$	$\left(\frac{f_{ck}}{20}\right)^{0,265}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,339}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	14	24	30	50
Increasing factor $N_{Rk,p,ucr} = \psi_C \cdot N_{Rk,p,ucr} (C20/25)$	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,489}$	$\left(\frac{f_{ck}}{20}\right)^{0,448}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,203}$
Splitting						
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min (N_{Rk,p} ; N^0_{Rk,c})^3$			
Characteristic edge distance ²⁾	$c_{cr,sp}$	[mm]	$\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})}$			
Characteristic spacing	$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$			
Concrete cone failure						
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 ¹⁾	40	50	65
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160
Characteristic edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$			
Characteristic spacing	$s_{cr,N}$	[mm]	$2 \cdot c_{cr,N}$			
Factor	cracked concrete	$k_{cr,N}$	7,7			
	uncracked concrete	$k_{ucr,N}$	11,0			

¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only.

²⁾ Applicable concrete thickness h_{sp} and area A_{sp} to determine characteristic edge distance $c_{cr,sp}$ according to Table B3

³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

⁴⁾ In absence of other national regulations

Würth Fixanchor W-FAZ PRO

Annex C1

Performance

Characteristic values for **tension loads, W-FAZ PRO/S** (Steel, zinc plated)

Table C2: Characteristic values for **tension loads** under static or quasi-static action,
W-FAZ PRO/A4 and **W-FAZ PRO/HCR**

Fastener size			W-FAZ PRO/A4, W-FAZ PRO/HCR			
			M8	M10	M12	M16
Installation factor	γ_{inst}	[-]	1,0			
Steel failure						
Characteristic resistance	$N_{Rk,s}$	[kN]	19,8	30,4	44,9	74,6
Partial factor ⁴⁾	γ_{Ms}	[-]	1,5			
Pull-out						
Characteristic resistance in cracked concrete C20/25	$N_{Rk,p,cr}$	[kN]	9,5	17	22	35
Increasing factor $N_{Rk,p,cr} = \psi_C \cdot N_{Rk,p,cr}$ (C20/25)	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,488}$	$\left(\frac{f_{ck}}{20}\right)^{0,5}$	$\left(\frac{f_{ck}}{20}\right)^{0,435}$	$\left(\frac{f_{ck}}{20}\right)^{0,350}$
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,p,ucr}$	[kN]	20	25	42	50
Increasing factor $N_{Rk,p,ucr} = \psi_C \cdot N_{Rk,p,ucr}$ (C20/25)	ψ_C	[-]	$\left(\frac{f_{ck}}{20}\right)^{0,240}$	$\left(\frac{f_{ck}}{20}\right)^{0,364}$	$\left(\frac{f_{ck}}{20}\right)^{0,213}$	$\left(\frac{f_{ck}}{20}\right)^{0,196}$
Splitting						
Characteristic resistance	$N^0_{Rk,sp}$	[kN]	$\min(N_{Rk,p}; N^0_{Rk,c}{}^3)$			
Characteristic edge distance ²⁾	$C_{cr,sp}$	[mm]	$\frac{A_{sp} + 0,8 \cdot (h_{sp} - h_{ef})^2}{(3,41 \cdot h_{sp} - 0,59 \cdot h_{ef})}$			
Characteristic spacing	$S_{cr,sp}$	[mm]	$2 \cdot C_{cr,sp}$			
Concrete cone failure						
Minimum, effective anchorage depth	$h_{ef,min}$	[mm]	35 ¹⁾	40	50	65
Maximum, effective anchorage depth	$h_{ef,max}$	[mm]	90	100	125	160
Characteristic edge distance	$C_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$			
Characteristic spacing	$S_{cr,N}$	[mm]	$2 \cdot C_{cr,N}$			
Factor	cracked concrete	$k_{cr,N}$	7,7			
	uncracked concrete	$k_{ucr,N}$	11,0			

¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only

²⁾ Applicable concrete thickness h_{sp} and area A_{sp} according to Table B3 to determine characteristic edge distance $C_{cr,sp}$

³⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018

⁴⁾ In absence of other national regulations

Würth Fixanchor W-FAZ PRO

Performance
Characteristic values for **tension loads**, **W-FAZ PRO/A4** and **W-FAZ PRO/HCR**

Annex C2

Table C3: Characteristic values for **shear loads** under static and quasi-static action

Fastener size				W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR			
				M8	M10	M12	M16
Installation factor		γ_{inst}	[-]	1,0			
Steel failure <u>without</u> lever arm							
Characteristic resistance	W-FAZ PRO/S	$V_{Rk,s}^0$	[kN]	15,7	26,8	38,3	60,0
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$V_{Rk,s}^0$	[kN]	16,8	27,8	39,8	69,5
Partial factor ²⁾		γ_{Ms}	[-]	1,25			
Ductility factor		k_7	[-]	1,0			
Steel failure <u>with</u> lever arm							
Characteristic bending resistance	W-FAZ PRO/S	$M_{Rk,s}^0$	[Nm]	30	60	105	240
	W-FAZ PRO/A4 W-FAZ PRO/HCR	$M_{Rk,s}^0$	[Nm]	27	55	99	223
Partial factor ²⁾		γ_{Ms}	[-]	1,25			
Concrete pry-out failure							
Pry-out factor	W-FAZ PRO/S	k_8	[-]	2,8	3,1	3,0	3,6
	W-FAZ PRO/A4 W-FAZ PRO/HCR	k_8	[-]	2,7	2,8	3,3	3,4
Concrete edge failure							
Effective length of fastener in shear loading		l_f	[mm]	$h_{ef}^{1)}$			
Outside diameter of fastener		d_{nom}	[mm]	8	10	12	16

¹⁾ Fastenings with anchorage depth $h_{ef} < 40$ mm are restricted to the use of structural components which are statically indeterminate and subject to internal exposure conditions only.

²⁾ In absence of other national regulations

Würth Fixanchor W-FAZ PRO

Performance
Characteristic values for **shear loads**

Annex C3

Table C4: Characteristic values for **seismic loading**, performance category **C1**

Fastener size				W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR							
				M8		M10		M12		M16	
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85
Tension load											
Installation factor	γ_{inst}	[-]		1,0							
Steel failure											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,s,C1}$	[kN]	19,8		30,4		44,9		79,3	
	W-FAZ PRO/A4	$N_{Rk,s,C1}$	[kN]	19,8		30,4		44,9		74,6	
	W-FAZ PRO/HCR	$N_{Rk,s,C1}$	[kN]								
Pull-out											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,p,C1}$	[kN]	9,1		15,0		22,0		30,0	
	W-FAZ PRO/A4	$N_{Rk,p,C1}$	[kN]	9,0		17,0		22,0		35,0	
	W-FAZ PRO/HCR	$N_{Rk,p,C1}$	[kN]								
Shear load											
Steel failure without lever arm											
Characteristic resistance	W-FAZ PRO/S	$V_{Rk,s,C1}$	[kN]	11,7	13,4	22,5	24,4	30,0	33,8	48,8	52,3
	W-FAZ PRO/A4	$V_{Rk,s,C1}$	[kN]	11,0	12,7	20,6	22,2	33,2	33,2	61,1	64,3
	W-FAZ PRO/HCR	$V_{Rk,s,C1}$	[kN]								
Factor for anchorages	with annular gap	α_{gap}	[-]	0,5							
	without annular gap	α_{gap}	[-]	1,0							

Würth Fixanchor W-FAZ PRO

Performance
Characteristic resistance for **seismic loading**

Annex C4

Table C5: Characteristic values for **seismic loading**, performance category **C2**

Fastener size				W-FAZ PRO/S, W-FAZ PRO/A4, W-FAZ PRO/HCR							
				M8		M10		M12		M16	
Effective anchorage depth	$h_{ef} \geq$	[mm]		40	45	40	60	50	70	65	85
Tension load											
Installation factor	γ_{inst}	[-]		1,0							
Steel failure											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		79,3	
	W-FAZ PRO/A4	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		74,6	
	W-FAZ PRO/HCR	$N_{Rk,s,C2}$	[kN]	19,8		30,4		44,9		74,6	
Pull-out											
Characteristic resistance	W-FAZ PRO/S	$N_{Rk,p,C2}$	[kN]	2,8	3,6	7,3	12,5	10,7	19,0	19,8	35,2
	W-FAZ PRO/A4	$N_{Rk,p,C2}$	[kN]	2,3	3,2	5,0	7,7	8,0	13,8	19,0	29,4
	W-FAZ PRO/HCR	$N_{Rk,p,C2}$	[kN]	2,3	3,2	5,0	7,7	8,0	13,8	19,0	29,4
Shear load											
Steel failure without lever arm											
Characteristic resistance	W-FAZ PRO/S	$V_{Rk,s,C2}$	[kN]	7,3	11,3	15,4	19,0	18,3	28,0	39,4	43,3
	W-FAZ PRO/A4	$V_{Rk,s,C2}$	[kN]	7,5	8,6	12,5	15,9	22,4	25,6	42,7	46,1
	W-FAZ PRO/HCR	$V_{Rk,s,C2}$	[kN]	7,5	8,6	12,5	15,9	22,4	25,6	42,7	46,1
Factor for anchorages	with annular gap		α_{gap}	[-]	0,5						
	without annular gap		α_{gap}	[-]	1,0						

Würth Fixanchor W-FAZ PRO

Performance
Characteristic resistance for **seismic loading**

Annex C5

Table C6: Characteristic values for tension and shear load under fire exposure, W-FAZ PRO/S (steel, zinc plated)

Fastener size		W-FAZ PRO/S					
		M8	M10	M12	M16		
Tension load							
Steel failure							
Characteristic resistance	R30	$N_{Rk,s,fi}$	[kN]	1,2	2,6	4,6	7,7
	R60			1,0	1,9	3,3	5,6
	R90			0,7	1,3	2,1	3,5
	R120			0,6	1,0	1,5	2,5
Shear load							
Steel failure <u>without</u> lever arm							
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	4,0	7,5	12,3	20,7
	R60			2,7	5,1	8,5	14,2
	R90			1,4	2,7	4,6	7,7
	R120			0,8	1,6	2,7	4,5
Steel failure <u>with</u> lever arm							
Characteristic resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	4,1	9,6	19,1	43,8
	R60			2,8	6,6	13,1	30,1
	R90			1,5	3,5	7,2	16,4
	R120			0,8	2,0	4,2	9,6

$N_{Rk,p,fi}$ and $N_{Rk,c,fi}$ according to EN 1992-4:2018

Würth Fixanchor W-FAZ PRO

Performance
Characteristic values under fire exposure, W-FAZ PRO/S (steel, zinc plated)

Annex C6

Table C7: Characteristic values for tension and shear load under fire exposure, W-FAZ PRO/A4 and W-FAZ PRO/HCR

Fastener size				W-FAZ PRO/A4, W-FAZ PRO/HCR			
				M8	M10	M12	M16
Tension load							
Steel failure							
Characteristic resistance	R30	$N_{Rk,s,fi}$	[kN]	4,0	6,9	11,0	18,1
	R60			2,9	5,0	8,0	13,1
	R90			1,8	3,1	4,9	8,1
	R120			1,2	2,1	3,4	5,6
Shear load							
Steel failure <u>without</u> lever arm							
Characteristic resistance	R30	$V_{Rk,s,fi}$	[kN]	8,5	17,6	32,0	52,6
	R60			6,2	12,6	22,6	37,1
	R90			3,9	7,5	13,1	21,5
	R120			2,8	5,0	8,4	13,8
Steel failure <u>with</u> lever arm							
Characteristic resistance	R30	$M^0_{Rk,s,fi}$	[Nm]	8,7	22,7	49,8	111,5
	R60			6,3	16,2	35,1	78,6
	R90			4,0	9,7	20,4	45,6
	R120			2,8	6,5	13,0	29,2

$N_{Rk,p,fi}$ and $N_{Rk,c,fi}$ according to EN 1992-4:2018

Würth Fixanchor W-FAZ PRO

Performance

Characteristic values under **fire exposure**, W-FAZ PRO/A4 and W-FAZ PRO/HCR

Annex C7

Table C8: Displacements under tension load, W-FAZ PRO/S (steel, zinc plated)

Fastener size		W-FAZ PRO/S								
		M8		M10		M12		M16		
Displacements under static or quasi-static action										
		$\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$		N: acting tension load						
		$\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$								
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Cracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,13	0,05	0,04	0,03				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,29	0,20	0,15	0,11				
Uncracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,03	0,01	0,004	0,005				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,03	0,03	0,03	0,03				
Displacement under seismic action C2										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{N, C2(DLS)}$	[mm]	3,9	4,9	2,8	4,7	2,4	4,2	2,5	4,5
Displacements for ULS	$\delta_{N, C2(ULS)}$	[mm]	11,3	14,3	9,4	16,1	7,3	12,9	7,2	12,8

Table C9: Displacements under tension load, W-FAZ PRO/A4 and W-FAZ PRO/HCR

Fastener size		W-FAZ PRO/A4, W-FAZ PRO/HCR								
		M8		M10		M12		M16		
Displacements under static or quasi-static action										
		$\delta_{N0} = \delta_{N0\text{-factor}} \cdot N$		N: acting tension load						
		$\delta_{N\infty} = \delta_{N\infty\text{-factor}} \cdot N$								
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Cracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,11	0,06	0,05	0,02				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,27	0,17	0,16	0,08				
Uncracked concrete										
Factor for displacement	$\delta_{N0\text{-factor}}$	[mm/kN]	0,02	0,00	0,001	0,00				
	$\delta_{N\infty\text{-factor}}$	[mm/kN]	0,05	0,05	0,05	0,05				
Displacement under seismic action C2										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS	$\delta_{N, C2(DLS)}$	[mm]	2,0	2,9	2,6	4,1	3,3	5,7	3,3	5,1
Displacements for ULS	$\delta_{N, C2(ULS)}$	[mm]	7,7	11,1	10,8	16,8	10,4	18,0	9,0	13,9

Würth Fixanchor W-FAZ PRO

Performance
Displacements under tension load

Annex C8

Table C10: Displacements under shear load, W-FAZ PRO/S (steel, zinc plated)

Fastener size		W-FAZ PRO/S								
		M8		M10		M12		M16		
Displacements under static or quasi-static action										
		$\delta_{V0} = \delta_{V0\text{-factor}} \cdot V$ V: acting shear load $\delta_{V\infty} = \delta_{V\infty\text{-factor}} \cdot V$								
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Factor for displacement		$\delta_{V0\text{-factor}}$ [mm/kN]	0,15	0,09	0,09	0,07				
		$\delta_{V\infty\text{-factor}}$ [mm/kN]	0,22	0,13	0,14	0,11				
Displacement under seismic action C2 ¹⁾										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS		$\delta_{V,C2(DLS)}$ [mm]	2,8	2,7	3,0	3,1	3,4	3,7	3,4	3,8
Displacements for ULS		$\delta_{V,C2(ULS)}$ [mm]	5,1	5,0	5,0	5,5	6,3	9,9	6,0	9,6

¹⁾ For anchorages with clearance in the fixture the annular gap must also be considered.

Table C11: Displacements under shear load, W-FAZ PRO/A4 and W-FAZ PRO/HCR

Fastener size		W-FAZ PRO/ A4 / W-FAZ PRO/ HCR								
		M8		M10		M12		M16		
Displacements under static or quasi-static action										
		$\delta_{V0} = \delta_{V0\text{-factor}} \cdot V$ V: acting shear load $\delta_{V\infty} = \delta_{V\infty\text{-factor}} \cdot V$								
Effective anchorage depth	$h_{ef} \geq$	[mm]	35	40	50	65				
Factor for displacement		$\delta_{V0\text{-factor}}$ [mm/kN]	0,26	0,14	0,12	0,09				
		$\delta_{V\infty\text{-factor}}$ [mm/kN]	0,39	0,20	0,17	0,14				
Displacement under seismic action C2 ¹⁾										
Effective anchorage depth	$h_{ef} \geq$	[mm]	40	45	40	60	50	70	65	85
Displacements for DLS		$\delta_{V,C2(DLS)}$ [mm]	2,8	3,0	3,4	3,5	3,5	4,2	3,8	4,4
Displacements for ULS		$\delta_{V,C2(ULS)}$ [mm]	5,2	5,1	7,0	8,4	7,5	11,8	7,8	11,1

¹⁾ For anchorages with clearance in the fixture the annular gap must also be considered.

Würth Fixanchor W-FAZ PRO	Annex C9
Performance Displacements under tension load	